




FPTX-320BFR - Walltextile

- Product:** Polyester Woven Wall textile with Grey backing
- Description:** Strong 320gsm Woven Polyester grey-back textile with inkjet coating for printable wall decoration.
- Application:** Wallcovering
- Compatibility:** Compatible (Eco) SOL, UV, Latex inks
- Packaging:** Packed in strong carton tubes and rolls are wrapped and protected inside the tube.

Properties:

ITEM	DATA	UNIT	TEST METHOD
Fabric	100%PES(300D)	.	DIN EN ISO2060
Total weight	320	g/sq.m	DIN53352 BS3424 method5A
Weight of fabric	150	g/sq.m	DIN53352 BS3424 method5B
Weight of pvc coating	170	g/sq.m	DIN53352 BS3424 method5B
Tensile strength	Warp 1300 _i	N/5cm	DIN53354 BS3424 method6A
	Weft 1000		
Tearing strength	Warp 50	N	DIN53356 BS3424 method 7A
	Weft 40		
Adhesion	30	N/5cm	DIN53357 BS3425 method9B
Suitable temperature	-20 -----+70	°C	DIN 53372 BS3424 method10
Flame retardancy	B1		
Lacquering	No		

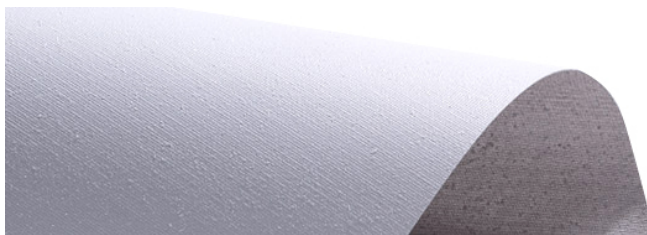

- Printing guidelines:** Max. temperature (material) should not exceed 80°C as overheating can impair the flatness of the media. Ink restrictions and heater settings have to be set for specific printer ink combinations to obtain the best results.
- Storage conditions:** 1 year under normal conditions (10–25°C at a relative humidity of 30–75 %). Higher humidity and/or temperature can affect the product performance. Always store the media in a dark place.
- Disposal:** The media and final prints can be disposed of as polyester waste. Material is suitable for recycling. Please consult local recycle resources. For treatment of ink or ink residue, please refer to your printer manual or supplier.

